

FOR SEALING HEAT SHRINKABLE TUBING

MOISTURE-SEAL HOT-MELT ADHESIVE TAPE

Install an effective water and moisture-resistant seal using hot-melt adhesive tape under and around the edges of heat shrinkable tubing

Provides extra bonding between the heat shrinkable tubing and the substrate

FEATURES

- Hot-melt adhesive tape seals the ends of large diameter heat shrink tubing which is not available with a multi-wall adhesive liner
- Ideal for sealing areas between wires in larger bundles
- Adheres well to PVC and polyolefin heat shrink tubing and most substrates — copper, aluminum and other metals
- Compatible with adhesive-lined heat shrink tubing to provide extra adhesive to block water and moisture from penetrating

TECHNICAL DATA


- Operating Temperature Range: -55°C (-67°F) to 110°C (230°F)
- Softening Point: 88°C (190°F) to 108°C (226°F)

SPECIFICATIONS

- RoHS Compliant
- Lead-Free
- Halogen Free

SIZE AND PACKAGING

- Width: 1.97 inches
- Thickness: .012 inches
- Standard Packaging: 10 feet

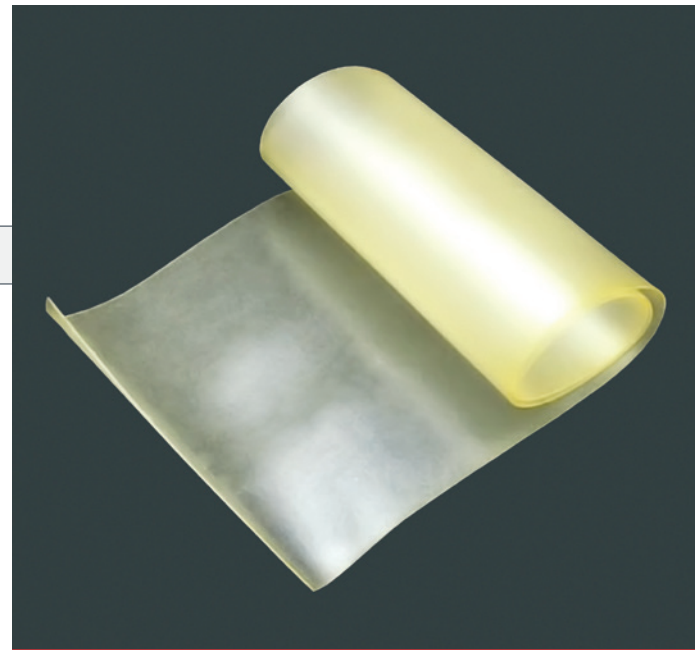

HOW TO USE WITH HEAT SHRINKABLE TUBING

- Remove the backing from the transparent hot-melt tape
- Wrap the tape between wires or at the ends of objects and cover with heat shrinkable tubing
- Use a heat gun to simultaneously melt the adhesive tape and tightly shrink the tubing
- The adhesive will flow under the heat shrink tubing to provide an extra strong seal of water and moisture protection